

PVCU Bi-Fold



imagine



'Imagine' single or double doors are the ideal complement to any flush fitting window due to their flush fitting sashes.

To achieve the flush external match, the doors must open out. The double doors have no floating mullion and so offer slimmer sightlines.

Features and Benefits

- ✓ Clean Contemporary look with slim sight-lines
- ✓ Outstanding thermal performance
- ✓ Available triple glazed
- ✓ Overall door 'U' value 1.35 double glazed
- ✓ Overall door 'U' value 0.99 triple glazed
- ✓ Fully adjustable slimline hinges
- ✓ Hidden track
- ✓ Choice of foil options
- ✓ Suited furniture
- ✓ Cranked lever/lever handle to allow tight stacking
- ✓ Premium quality magnets
- ✓ Available in 16 different opening configurations
- ✓ DDA compliant where required
- ✓ Fully welded or mechanical outer frame and sashes
- ✓ Pas 24 and Secure by Design achievable (Must have standard cranked handle)
- ✓ ERA 5 star guarantee
- ✓ Choice of 3 threshold options
- ✓ 20mm Astragal Bar option
- ✓ Midrail option available

Secured by Design



Police Preferred Specification

Designed to meet the security requirements of British standards PAS 24 and Secured by Design

PVCU Bi-Fold



imagine







Colour Options

Both sides or on smooth white

Both sides or on smooth white
Supplied on White base substrate

On smooth white only

Both sides only



Handles

Standard Bi-fold Handles
(Black, White, Gold, Chrome)



Cranked lever/lever handle

Available in White, Black, Gold and Chrome



Internal Intermediate



Hidden track



Fully adjustable hinges
available in White or Black




Obligatory
FOR
SBD

Cranked

Intermediate

(Main door handle)

Imagine Door Configurations

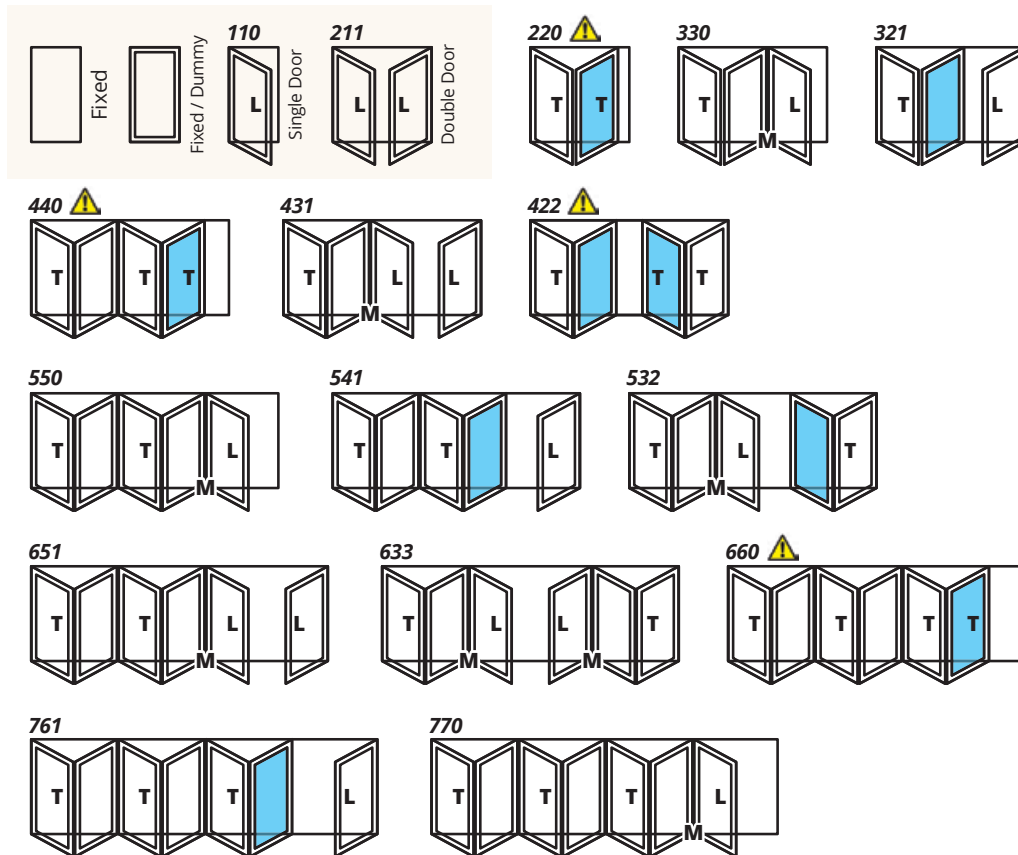

Key:

These doors do not have a single prime door. Two leaves need to be operated together - No external handle available

Sashes are manufactured 60mm wider than adjoining sashes to allow them to operate correctly

L Indicates cranked lever/lever handle with euro cylinder

T Indicates internal intermediate handle

M Indicates magnet

Min/Max frame heights

Std frame 1810/2450mm
Std frame / Low Ali threshold 1797/2437mm
Std frame / Room divider 1782/2422mm

Minimum frame widths

Bi-fold - Sash only 600mm
Single Door - Sash with frame 710mm
Double Door - Sashes with frame 1200mm